
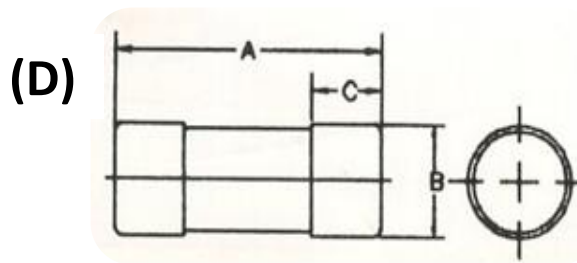
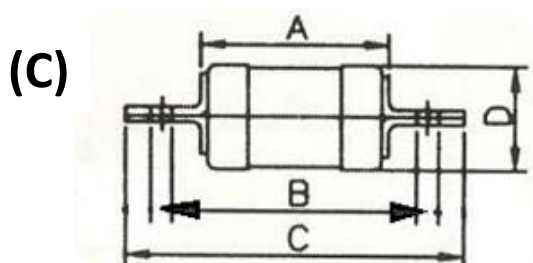
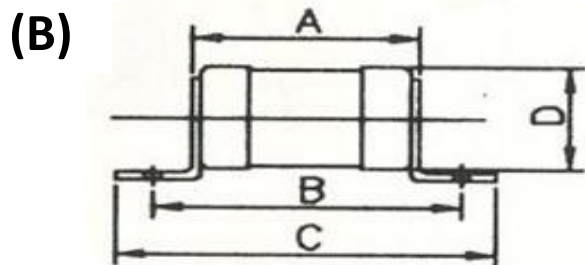


FUSEGEAR ELECTRIC H.R.C. FUSE LINK

(B.S. 88: Part 5: 1988, IEC 269)

KEMA TESTED

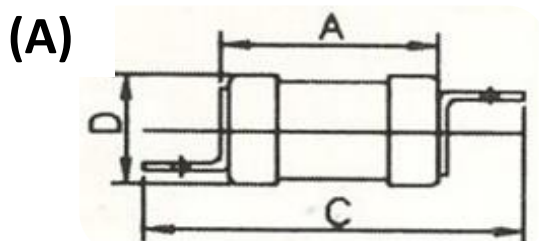

Type Ref.	Current Rating	Breaking Capacity	Dimension				Type of tag
			A (mm) Max	B (mm) Nom	C (mm) Max	D (mm) Max	
FE01 (A)	2,4,6,10,16,20,25,32	100kA at 500V	36.5	-	56.0	13.5	Staggered Blade
FE02 (B)	2,4,6,10,16,20,25,32	100kA at 500V	36.5	44.5	56.0	13.5	Offset
FG01 (B)	16,20,32	100kA at 500V	57.0	73.0	86.0	21.7	Offset
FK01 (B)	40,50,63	120kA at 500V	58.0	73.0	91.0	27.0	Offset
FL01 (C)	80,100	120kA at 500V	70.0	111.0	138.0	37.0	Central
FL02 (B)	80,100	120kA at 500V	70.0	97.0	116.0	37.0	Offset
FL03 (B)	80,100	120kA at 500V	70.0	94.0	111.0	37.0	Offset
FM01 (C)	125,160,200	120kA at 500V	77.0	111.0	138.0	42.0	Central
FN01 (C)	250,315,400	120kA at 500V	77.0	111.0	138.0	61.0	Central
FK-FRH (D)	15,30,50,60	120kA at 500V	57.0	22.2	16.0	-	NA
FL-FRH (D)	30,60,80,100	120kA at 500V	57.0	30.16	16.0	-	NA



CONWAY
Connecting Power

Tel : +6 03 5122 1223
Fax : +6 03 5121 1109

Email : ctm@conway.com.my
Web : www.conway.com.my